




brand new INSULATED CONTAINERS - Type PLO/I

- with UN-dangerous goods authorization
- packing group II + III/GGVS-GGVE-GGVSee/ADR-RID A.6
- basic dimensions 1.140 mm x 1.140 mm
- cage of mild steel, galvanized
- container can be accessed by forklift or by lift truck from all 4 sides
- container completely filled is 1:1 stackable

tank volume: 650 / 850 / 1.000 litres

- material 1.4301 (Aisi 304) alternatively 1.4401 (Aisi 316)
- working pressure: max. 0,5 bar
- 30 mm PU-foam insulation all around (except for: manhole area)
- insulation jacket is welded hermetically and waterproof, also of 1.4301
- welding seams are carried out by automatic welding process, subsequently pickled and passivated in- and outside
- with outlet bead and stainless steel ball-valve 2" male thread and stainless steel cap
- upper bottom incl. manhole hoop are compressed from one piece
- manhole DN 400, with hinged cover, hinge, handle and quick locking
- 1 nozzle 1/2" with safety valve for overpressure 0,49 bar of stainless steel
- 1 breathing nozzle 2", with cap, of stainless steel

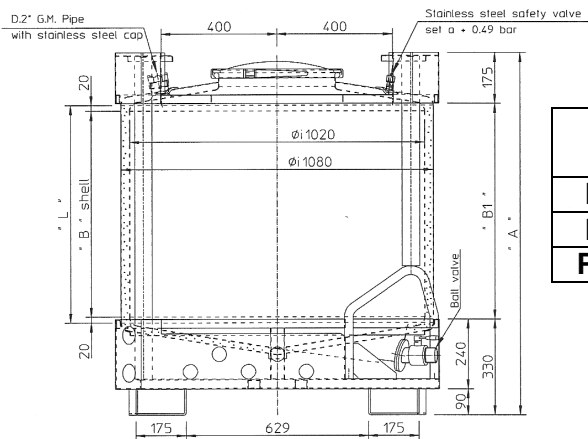

Type	Litres	Height	Material 1.4301 Price in €	Material 1.4401 Price in €
PLOI 650	670	1.250	2.820,--	3.120,--
PLOI 850	875	1.500	2.935,--	3.245,--
PLOI 1000	1050	1.750	3.295,--	3.595,--

Prices ex works, tax excl.

Legend		
	equivalent to	equivalent to
V2A	AISI 304	1.4301
V4A	AISI 316	1.4401