




brand new INSULATED - CONTAINERS - Type PLI

basic dimensions 1.120 mm x 1.120 mm
 container can be accessed by forklift or lift truck from all 4 sides
 container completely filled 1:1 stackable

tank volume: 650 / 850 / 1.000 Litres

- material 1.4301 (Aisi 304) alternatively 1.4401 (Aisi 316)
- working pressure: max. 0,5 bar
- 30 mm PU-foam-insulation all around (except for: manhole area)
- insulation jacket is welded hermetically and waterproof, also of 1.4301
- welding seams are carried out by automatic welding process, subsequently pickled and passivated in- and outside
- upper bottom incl. manhole hoop are compressed from one piece
- manhole DN 400, with hinged cover, hinge, handle and quick locking
- with outlet bead and stainless steel ball-valve 2" male thread and stainless steel cap
- on the manhole cover is 1 nozzle DN 50 / DIN 11851 with double-acting safety valve and stainless steel cap

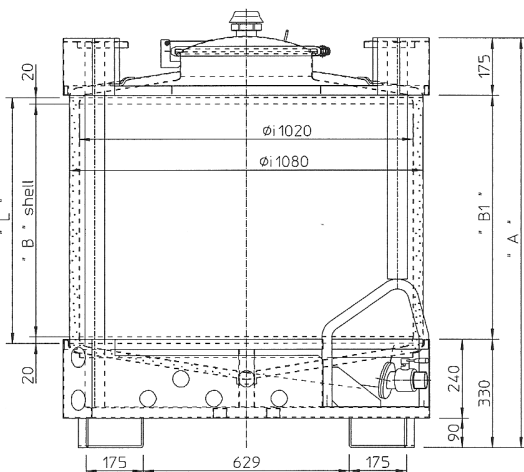

Type	Litres	Height	Material 1.4301 Price in €	Material 1.4401 Price in €
PLI 650	670	1.250	2.650,--	2.985,--
PLI 850	875	1.500	2.830,--	3.185,--
PLI 1000	1078	1.750	3.000,--	3.400,--
PLI 1250	1283	2.000	3.890,--	4.260,--

Prices ex works, tax excl..

Legend		
	equivalent to	equivalent to
V2A	AISI 304	1.4301
V4A	AISI 316	1.4401